Titan 2

- Concealed installation behind the shelf
- Bolt: 12 mm ø
- Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
- Height adjustment: ± 4 mm
- Minimum shelf thickness: 24 mm
- Adjustment of shelf tilt
- Steel, galvanised

Page reference:
- For fixing screws (order no. 0 065 480), see page 882

Order no.	PU
0 063 598	1/20 ea.

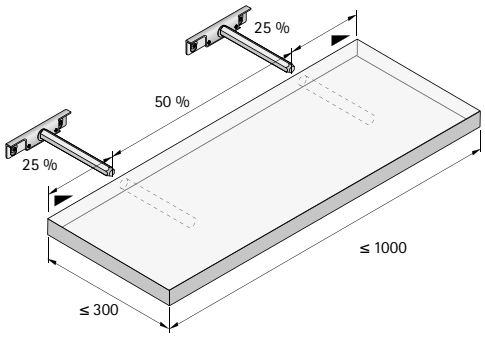

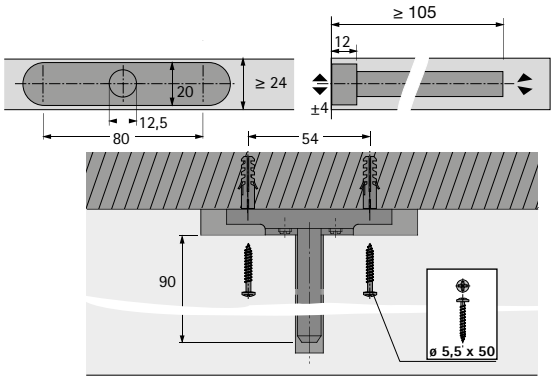

Titan 3

- Concealed installation behind the shelf
- Bolt: 12 mm ø
- Max. load capacity is 50 kg/m² for shelves measuring 1000 x 300 mm, 100 kg/m² for shelves measuring 1000 x 250 mm and 160 kg/m² for shelves measuring 1000 x 200 mm
- Height adjustment: ± 2 mm
- Minimum shelf thickness: 19 mm
- Adjustment of shelf tilt
- Steel, galvanised

Page reference:
- For fixing screws (order no. 0 065 480), see page 882
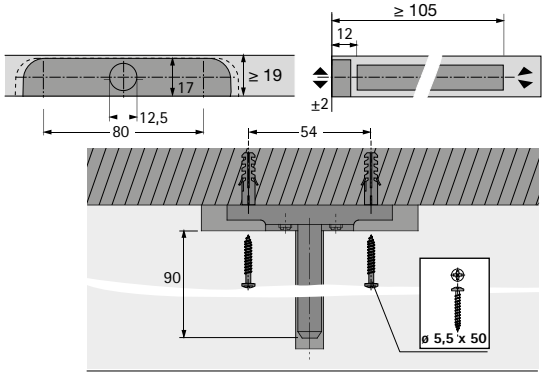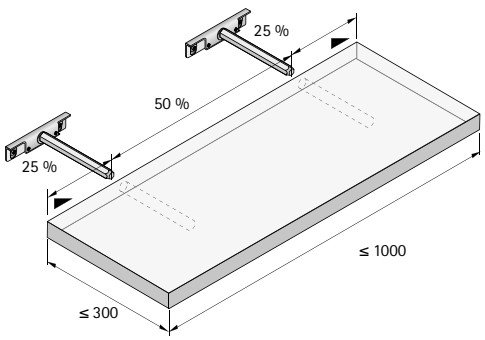
Order no.	PU
0 079 714	1/20 ea.